


### Features and Benefits

1. Materials do not compromise the integrity of the pipeline.
2. Captive bolt design makes installation easy and eliminates loose pieces in the field.
3. Can be manufactured to fit any diameter of pipe.
4. Ductile iron galvanized lugs with drop in bolt design



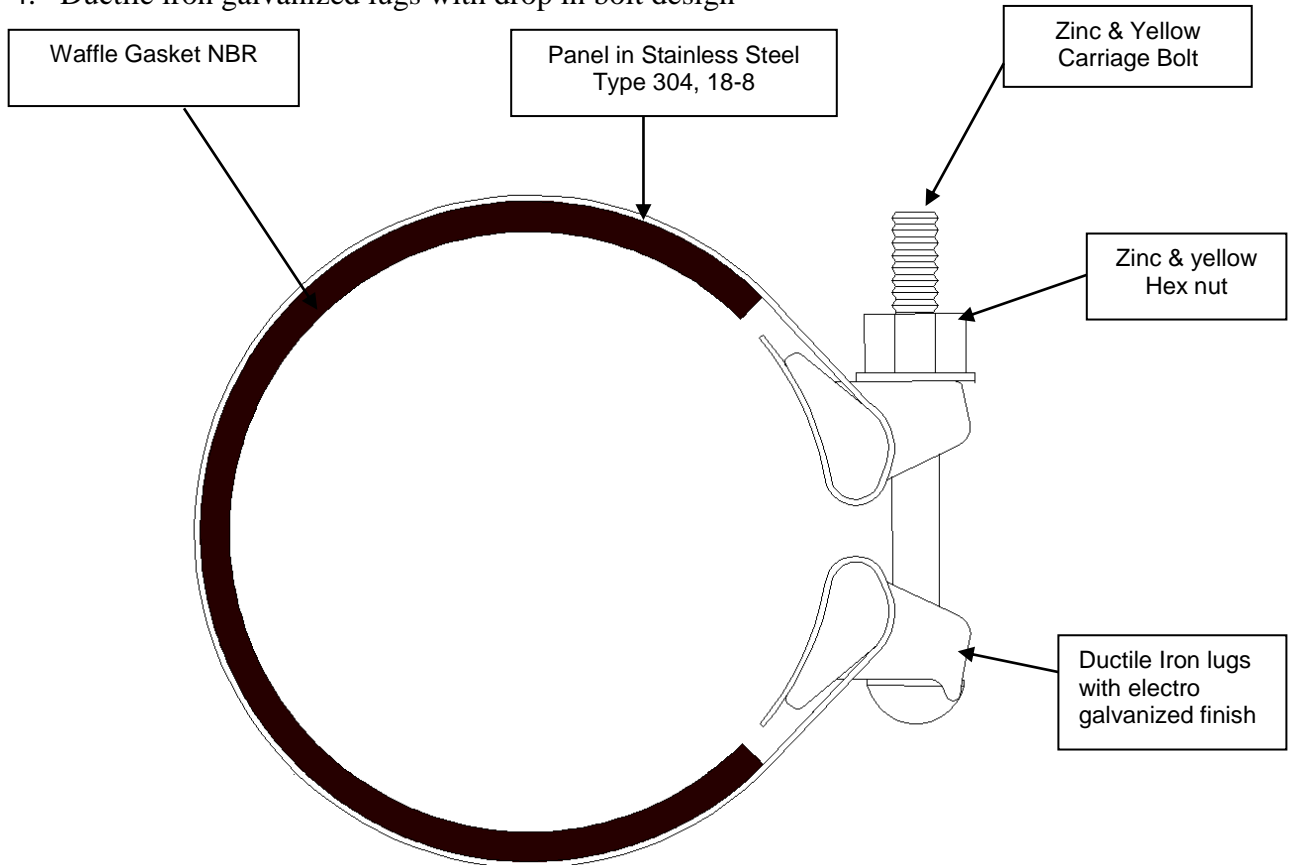

### *Scope*

The intent of the specification is to receive ½” – 12” diameter stainless steel patch clamp capable of repairing leaks in IPS, CTS and other small diameter pipes of various materials. The clamp furnished shall be equivalent to Models 3151 or 3151W, as manufactured by PowerSeal Pipeline Products Corporation.

### *Design and Material Specification*

1. The patch clamp shall meet or exceed all material specifications as listed below.
2. The exterior band of the patch clamp shall be type 304 (18-8) stainless steel.
3. The patch clamp shall have a waffle type gasket permanently attached to the panel at the factory.

The waffle gasket shall be in NBR. It shall be free from porous areas, foreign material, and visible defects, all made from 100% new rubber; able to work on temperatures of -25 to +248°F.

4. Lugs shall be ductile iron with electro galvanized finish.
5. There shall be no paper or plastic adhesive labels attached to the patch clamp, any information appearing on the clamps shall be stenciled.
6. This is a specific OD type clamp.

<b>Material Specifications</b>		
<b>Part Name</b>	<b>Material</b>	<b>Mat. specs</b>
Panel	Stainless Steel type 304	ASTM A240
Lugs	Galvanized Ductile Iron	ASTM A536
Bolts	Zinc & Yellow	ASTM A325
Nuts	Zinc & yellow	ASTM A563
Waffle Gasket	NBR	ASTM D2000

