


Features and Benefits

1. Materials do not compromise the integrity of the pipeline.
2. Captive bolt design makes installation easy and eliminates loose pieces in the field.
3. Can be manufactured to fit any diameter of pipe.
4. Ductile iron galvanized lugs with drop in bolt design.
5. Removable gasket design
6. Allows installer more gasket than a typical patch type clamp for ease of installation.



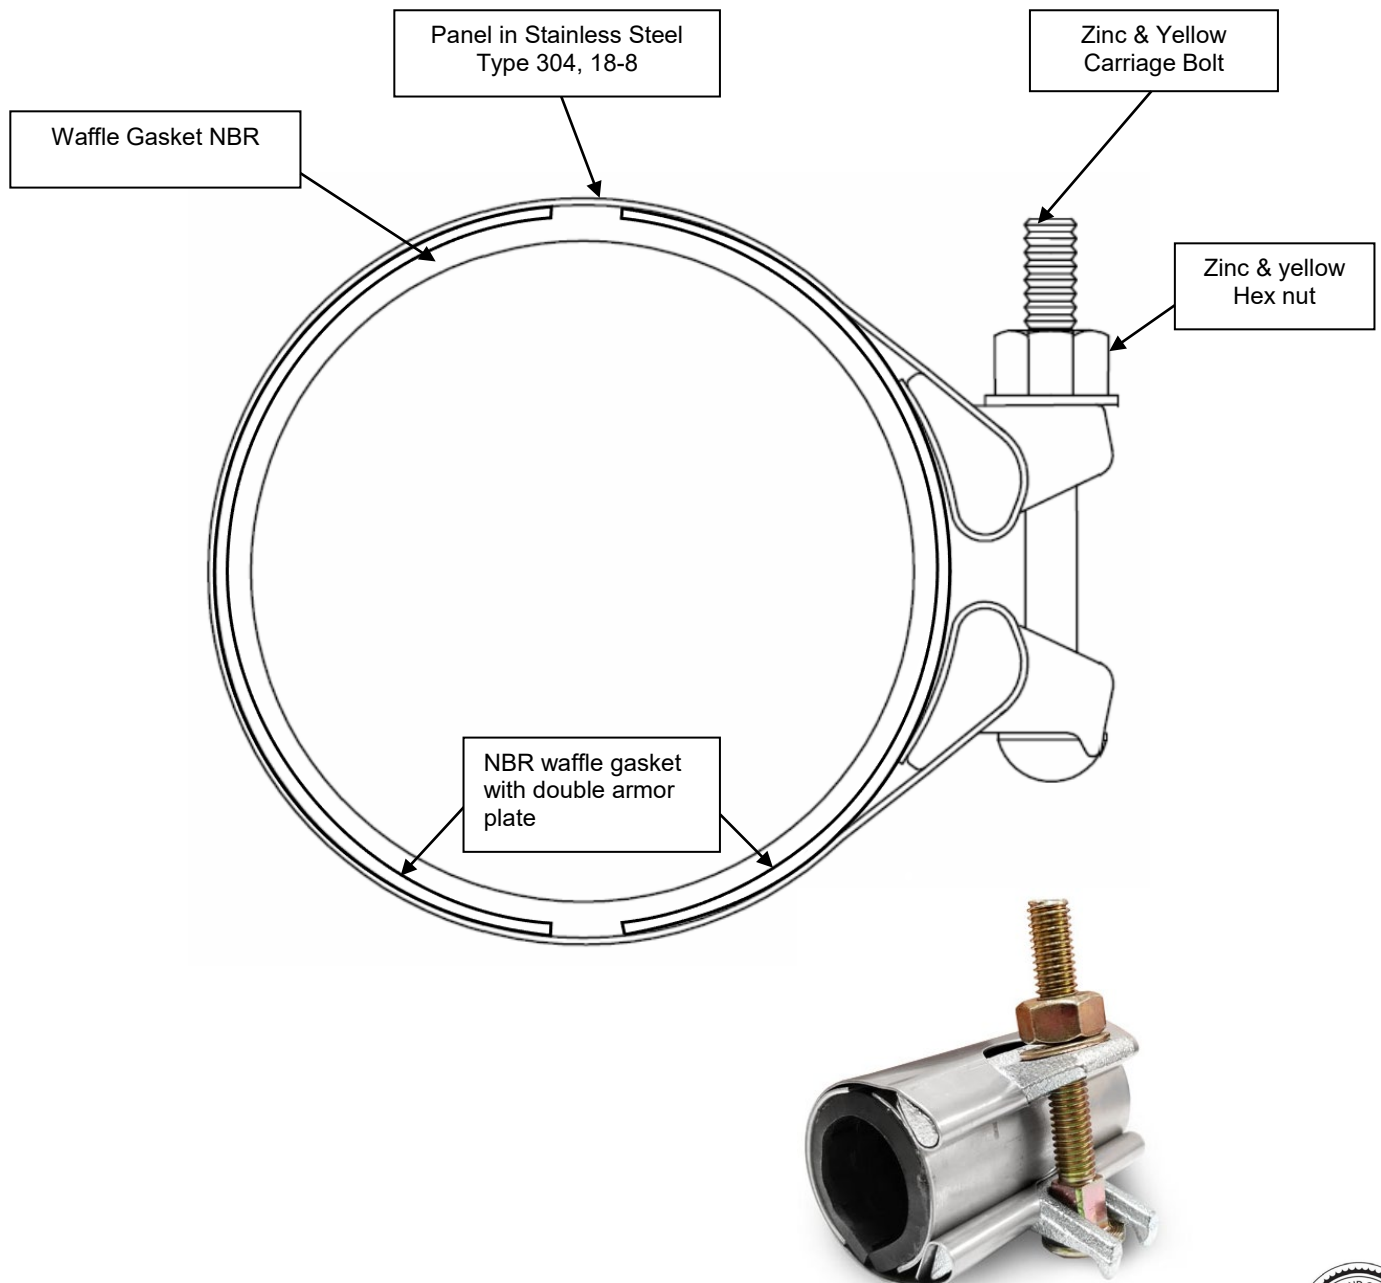

Scope

The intent of the specification is to receive 1/2” – 2” diameter stainless steel complete wrap-around clamp capable of repairing leaks in IPS, CTS and other small diameter pipes of various materials. The clamp furnished shall be equivalent to Model 3153PS as manufactured by PowerSeal Pipeline Products Corporation.

Design and Material Specification

1. The patch clamp shall meet or exceed all material specifications as listed below.
2. The exterior band of the repair clamp shall be type 304 (18-8) stainless steel.
3. The clamp shall have a removable waffle type gasket.
The gasket shall be in NBR. It shall be free from porous areas, foreign material, and visible defects, all made from 100% new rubber; able to work on temperatures of -25 to +248°F.
4. Lugs shall be ductile iron with electro galvanized finish.
5. There shall be no paper or plastic adhesive labels attached to the patch clamp, any information appearing on the clamps shall be stenciled.
6. This is a specific OD fit clamp.

| Material Specifications | | |
|--------------------------------|--------------------------|-------------------|
| Part Name | Material | Mat. specs |
| Panel | Stainless Steel type 304 | ASTM A240 |
| Lugs | Galvanized Ductile Iron | ASTM A536 |
| Bolts | Zinc & Yellow | ASTM A325 |
| Nuts | Zinc & yellow | ASTM A563 |
| Gasket | NBR | ASTM D2000 |

