

3504 GALVANIZED COMPRESSION COUPLING

CENTER BARREL: Carbon Steel per AISI C1010-15.

GLANDS: Malleable Iron per ASTM A47.

GASKET: NBR per ASTM D2000 suitable for oil, mild acids, water, and salt media with a temperature range of -40° F to +248° F.

FINISH: Galvanized.



Nominal Pipe Size		Pipe OD Range		Box Weight		Body Length		Box	Part Number	List Price
Inches	MM	Inches	MM	lbs.	kgs	Inches	MM	Qty.		
1/2	15	0.84	21	19	9	4	102	25	350400500000	\$55.30
3/4	20	1.05	27	19	9	4.4	111	15	350400750000	\$59.30
1	25	1.32	34	16	7	4.5	114	10	350401000000	\$68.30
1 1/4	32	1.66	42	12	5	4.5	114	6	350401250000	\$83.80
1 1/2	40	1.90	48	15	7	5	127	6	350401500000	\$95.10
2	50	2.38	60	21	10	5.4	137	6	350402000000	\$120.00

HOW TO ORDER: Specify Model Number and Pipe Size.

3506 POWERMAX COUPLING

One range fits all pipe ODs IPS PVC to Rough Barrel AC

CENTER BARREL: Ductile Iron per ASTM A536 and AWWA C219.


GLANDS: Ductile Iron per ASTM A536 and AWWA C219.

GASKET: SBR per ASTM D2000 with conical design produced from 100% new rubber to ensure performance under varying pressures with superior storage characteristics per AWWA C219. Suitable for mild acids, water and salt media with a temperature range of -40° to +200° F. Other materials available.

BOLTS & NUTS: Low Alloy Steel per ASTM A325, ASTM A563, and AWWA C219.

Type 304 (18-8) Stainless Steel per ASTM A193 and A194. Type 316 available.

FINISH: Epoxy.

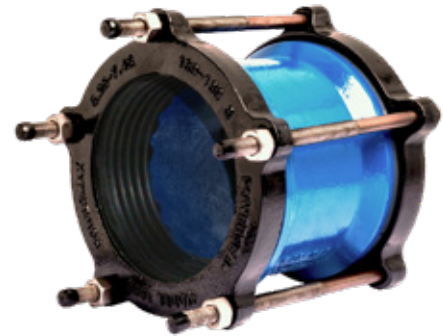

Nominal Pipe Size			Pipe OD Range		Standard Weight		Standard Barrel Length		Standard Barrel Part Number	List Price	Standard Barrel Part Number w/SST N&Bs	List Price w/ SST N&Bs
In	MM	Letter	Inches	MM	lbs	kgs	Inches	MM				
2	50	A	2.30-2.90	58-74	16	8	5	125	350602AA00000	\$162.80	350602AA0SS00	\$218.40
3	80	A	3.40-4.20	86-107	21	10	5	125	350603AA00000	\$258.20	350603AA0SS00	\$331.20
4*	100	A	4.20-5.33	107-135	27	13	6	150	350604AA00000	\$ 333.10	350604AA0SS00	\$ 431.20
6*	150	A	6.25-7.45	159-189	36	17	6	150	350606AA00000	\$473.60	350606AA0SS00	\$596.40
8*	200	A	8.40-9.79	214-249	60	28	10	250	350608AA00000	\$ 675.90	350608AA0SS00	\$876.60
10	250	A	10.70-12.12	272-308	75	34	10	250	350610AA00000	\$ 814.20	350610AA0SS00	\$1,050.60
12	300	A	12.75-14.38	324-365	130	59	10	250	350612AA00000	\$ 1,017.00	350612AA0SS00	\$1,226.80
14	350	A	15.25-16.90	387-429	148	67	12	300	350614AA00000	\$2,557.90	350614AA0SS00	\$3,580.00
16	400	A	16.00-17.80	406-452	180	82	12	300	350616AA00000	\$4,263.90	350616AA0SS00	\$5,965.00
		B	17.40-19.00	442-483	180	82	12	300	350616BA00000			

Note: Protection against possible pull out of pipe ends is not provided with cast couplings unless pipe is restrained.

*Pipe diameters less than IPS/STEEL rated up to 50 psi work pressure.

HOW TO ORDER: Specify model number, pipe size with letter code(s) if applicable. **EXAMPLE:** 6" Steel O.D. 6.63 to 6" Asbestos cement O.D. 7.37. Order 3506-6A. **Part number:** 350606A00000.