

SERVICE SADDLES

CAST STAINLESS STEEL SADDLE


3415AS







- Cast Stainless Steel body 18-8 per ASTM A743.
- One side closed lug allows preassembly
- Eliminates vulnerable epoxy coatings.
- Patented TwinSeal gasket design
- For use on PVC, DI, Cast and AC pipes
- Cost competitive versus bronze

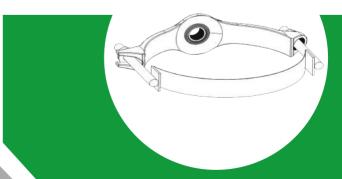


1-800-800-0932

2-2018

www.powerseal.com • 701 Pleasant View Drive Wichita Falls, TX 76306 • 940-767-5566 fax: 940-723-8378



COMPONENT REFERENCE

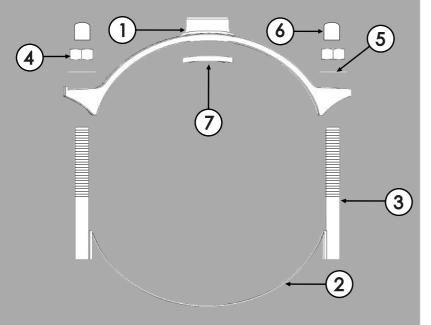


MATERIAL SPECIFICATIONS				
ПЕМ	QTY	PART NUM	MATERIAL	MAT. SPEC.
1	1	Saddle body	Stainless Steel Type 304	ASTM A240
2	2	Strap	Stainless Steel Type 304	ASTM A240
3	4	Bolt	Stainless Steel Type 304	ASTM A193
4	4	Heavy-Hex Nut	Stainless Steel Type 304	ASTM A193
5	4	Washer	Stainless Steel Type 304	ASTM A240
6	4	Thread Cap	Plastic	701-89 Black
7	1	Gasket *	Nitrile (NBR)	ASTM D2000

* Patented TwinSeal.

FEATURES & BENEFITS

- Heavy duty cast stainless steel construction.
- Patented "Twinseal" O-ring gasket (nitrile).
- Wide range.
- Time proven design.
- Available with NPT or AWWA (CC) threads.
- Strap heavy gauge corrosion resistant stainless steel.
- Heavy hex nuts and washers.
- Single strap 2" wide.
- Cost comparative with bronze saddles.

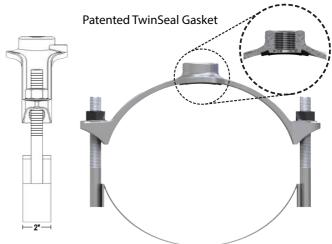

1-800-800-0932

www.powerseal.com • 940-767-5566 fax: 940-723-8378 701 Pleasant View Drive Wichita Falls, TX 76306



