


Features and Benefits

1. Materials do not compromise the integrity of the pipeline.
2. Heavy hex nuts with fusion bonded coating to prevent seizing and galling. Never Gall coating available for extra anti-seize protection.
3. SaddleCorp are available for flare, pack, PowerJoint attachment fittings for (3/4", 1", 1.5", 2").
4. SaddleCorp O-ring gasket design incorporates both hydrostatic and mechanical forces to produce a dynamic seal.
5. Certified by IAPMO R&T to NSF/ANSI 61 for materials safety only, and to NSF/ANSI 372 for low lead compliance.

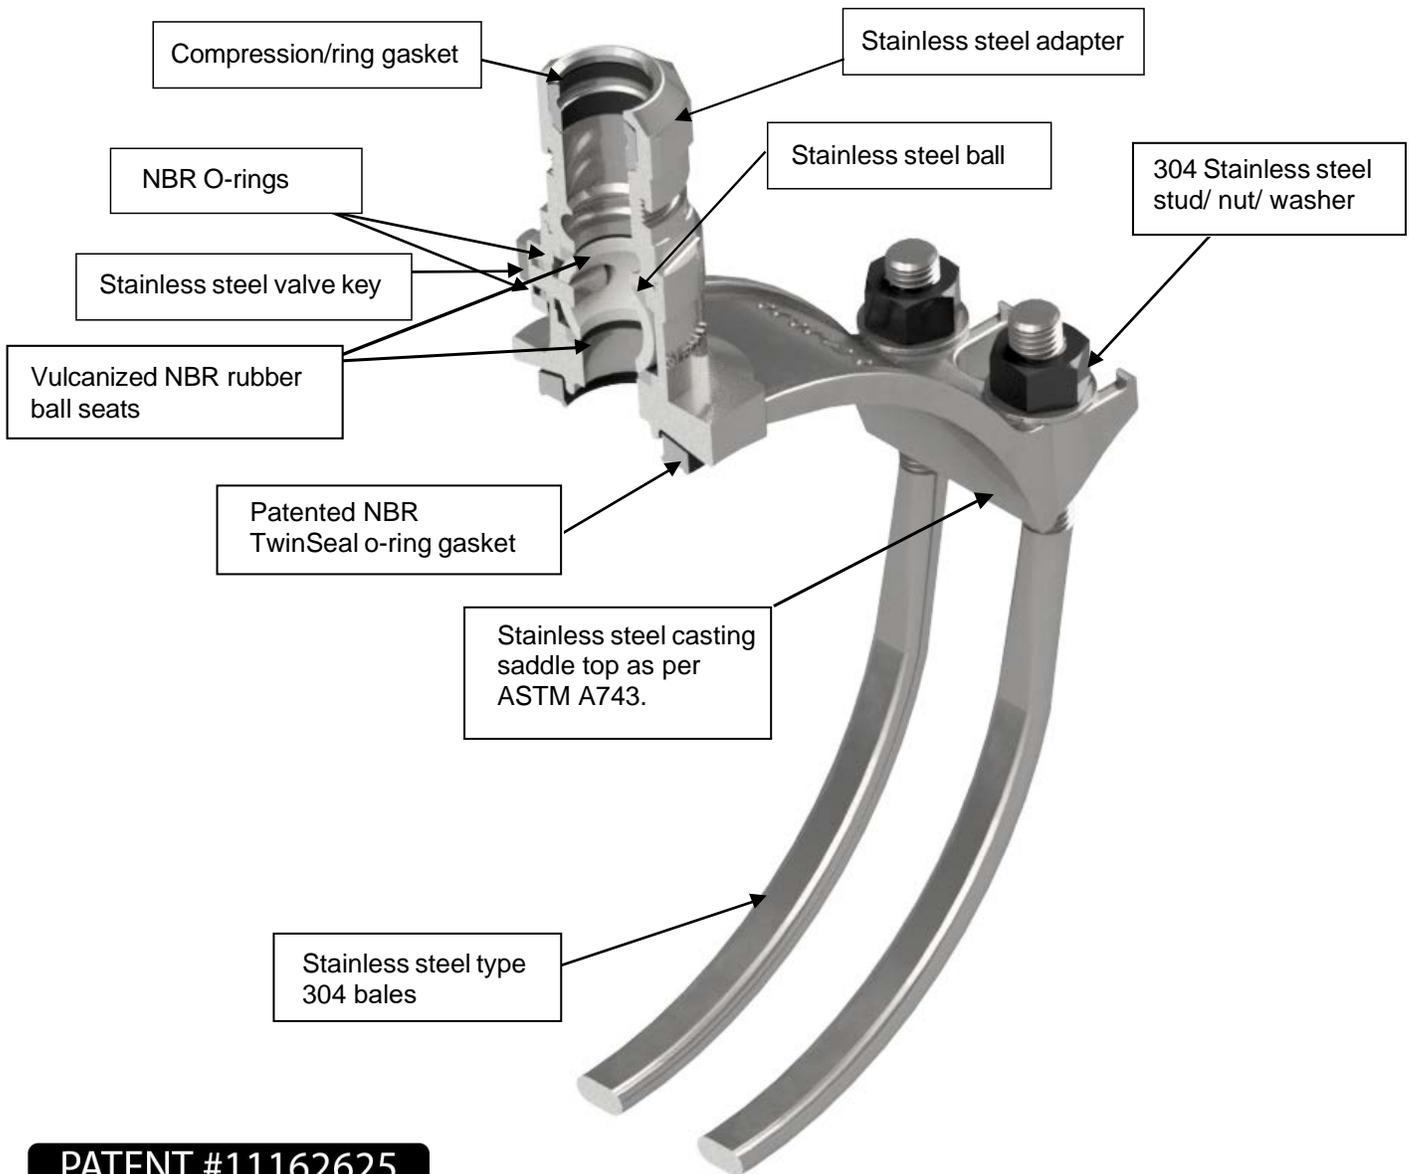

PATENT #11162625


Scope

The intent of the specification is to receive 3” diameter and up all cast body stainless steel SaddleCorp. The SaddleCorp furnished shall be equivalent to Model 3450AS as manufactured by PowerSeal Pipeline Products Corporation.

Design and Material Specification

The stainless steel SaddleCorp shall meet or exceed all material specifications as listed below:

1. SaddleCorp should incorporate both saddle and corp stop in one single cast piece, and shall be stainless steel as per ASTM A743.
2. The saddle body shall have an O-ring gasket permanently attached to the casting at the factory. The TwinSeal o-ring gasket along with all seals shall be made from NBR, they shall be free from porous areas, foreign material, and visible defects, all made from 100%new rubber. NBR can resist temperatures between -40 to +248°F.
3. Adhesive will be used on adapters to prevent disassembly during installation.
4. There shall be no paper or plastic adhesive labels attached to the saddle, any information appearing on the saddle shall be ink stenciled.
5. SaddleCorp is NSF/ANSI 61 certified where applicable.
6. Meet AWWA C800 where applicable.
7. IPS Pack joint not compatible with SIDR 7 pipe.
8. Up to 300 psi taking into consideration of the installation, age and condition of pipe, backfilling procedures and pipe pressure ratings. See chart below.

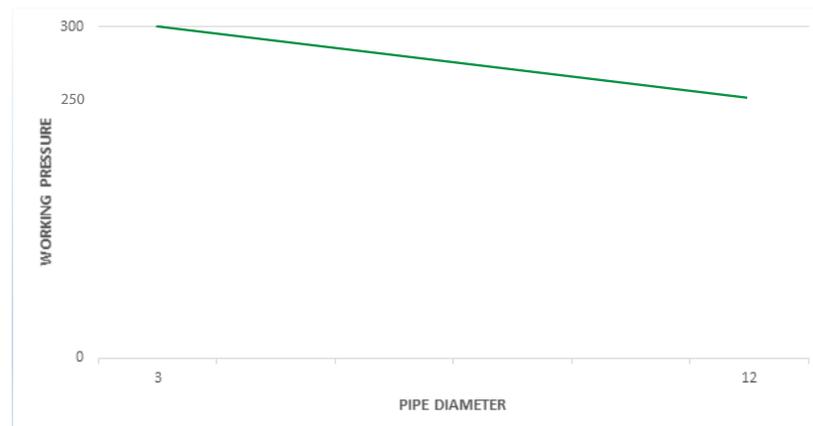

Model 3450AS with bales



Flare



PowerJoint - CTS



Pack Joint - IPS/CTS



SIDR 7 - Pack Joint

Material Specification

Part Name	Material	Mat. specs
SaddleCorp Body	Stainless Steel 18-8	ASTM A743
Bale	Stainless Steel Type 304	ASTM A276
Nuts & washers	Stainless Steel Type 304	ASTM A193
Corp gaskets	NBR	ASTM D2000
O-ring gasket	NBR	ASTM D2000
Parts (ball, adapter, key)	Stainless Steel 18-8	ASTM A743

Pipe Size		Pipe OD Range		
in.	mm.	letter code	in.	mm.
3	80	B	3.45 - 4.05	88 - 103
4	100	A	4.00 - 4.50	102 - 114
		B	4.74 - 5.63	120 - 143
6	150	A	6.00 - 6.63	152 - 168
		B	6.84 - 7.64	174 - 194
		C	6.63 - 6.90	168 - 175
8	200	A	8.00 - 8.63	203 - 219
		B	8.54 - 10.10	216 - 257
		C	8.63 - 9.05	219 - 229
10	250	A	10.00 - 11.10	254 - 282
		B	10.64 - 12.12	270 - 308
12	300	A	12.00 - 13.20	305 - 335
		B	12.62 - 14.32	321 - 364