

3140 SMALL DIAMETER COLLAR LEAK

PANEL: Type 304 (18-8) Stainless Steel per ASTM A240.

GASKET: NBR multi-O-Ring stepped design from 100 % new rubber to ensure performance under varying pressures with superior storage characteristics. Suitable for oil, mild acids, water and salt media with a temperature range of -40°F to +248°F

ARMOR PLATE: Type 304 (18-8) Stainless Steel per ASTM A240, bonded to the gasket.

BOLTS & NUTS: Carbon steel per ASTM A307, with electro-galvanized dichromate finish for added corrosion resistance.

LUGS: Ductile iron per ASTM A536 with electro-galvanized finish.




Nominal Pipe Size		Pipe OD Range		Collar Type	Part Number	Width / Price list			
Inches	MM	Inches	MM			3 In	80 MM	6 In	150 MM
3/4	20	1.05	27	Sch 40 Collar/ API Line Pipe/ EUE Tubing	3140+Pipe size+width+ Collar type	\$51.20		\$94.80	
1	25	1.32	33			\$53.20		\$96.70	
1 1/4	32	1.66	42			\$55.00		\$98.70	
1 1/2	40	1.90	48			\$70.00		\$137.20	
2	50	2.38	61			\$70.80		\$139.70	
2 1/2	65	2.88	73			\$75.80		\$143.70	

Collar type	
Sch 40 collar	HA
API Line pipe	PA
EUE Tubing	RA

Sch = Schedule API = American Petroleum Institute EUE = External Upset End - SDR = Standard Dimension Ratio

PowerSeal Collar Leak Repair Clamps provide a simple and permanent repair for leaking Solvent Weld PVC Bells and Collars as well as threaded Steel Pipe Collars. Since Collar Leak Clamps are designed to seal on both the outside diameter of the pipe and the leaking collar or bell, it is important that the proper clamp is ordered. These repair clamps are not recommended for leaking Push-On-Joint (gasketed) Bells.

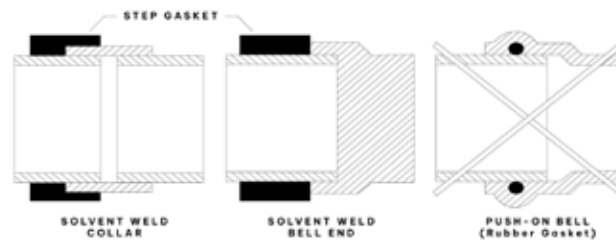

HOW TO ORDER: Specify Model Number, Pipe Size with Collar Type, and Width. EXAMPLE: 2" Steel O.D. 2.38 with 3" wide Schedule 40 Collar. Order 3140 - 2" Sch 40 x 3. **Part Number:** 3140+Pipe size+width+Collar type = 3140020030HA