

3232 BELL JOINT LEAK CLAMP

(FOR CAULKED & PUSH-ON CAST IRON AND DUCTILE IRON PIPE JOINTS)

CASTINGS: Ductile Iron per ASTM A536.

GASKET: NBR produced from 100% new rubber to ensure performance under varying pressures with superior storage characteristics. Suitable for oil, mild acids, water, salt media and most aliphatic hydrocarbon fluids with a temperature range of -25°F to +248°F.

BOLTS & NUTS: Low Alloy Steel per ASTM A325 and ASTM A563. Optional Stainless Steel available.

FINISH: Epoxy.



3232

Nominal Pipe Size		Pipe OD Range		Approx Weight		Part Number	List Price	Part Number SS BOLTS	List Price
Inches	MM	Inches	MM	lbs.	kgs.				
3	80	3.80-3.96	97-101	23	10	3232030000HA	\$ 253.90	323203SS00HA	\$ 339.00
4	100	4.80-5.00	122-127	25	11	3232040000HA	\$ 261.40	323204SS00HA	\$ 347.00
6	150	6.90-7.10	175-180	32	15	3232060000HA	\$ 287.90	323206SS00HA	\$ 373.00
8	200	9.05-9.30	230-236	37	17	3232080000HA	\$ 397.90	323208SS00HA	\$ 530.00
10	250	11.10-11.40	282-290	45	20	3232100000HA	\$ 499.90	323210SS00HA	\$ 631.00
12	300	13.20-13.50	335-343	69	31	3232120000HA	\$ 540.70	323212SS00HA	\$ 660.30
14	350	15.30-15.65	385-393	85	38	3232140000HA	\$ 692.50	323214SS00HA	\$ 884.60
16	400	17.40-17.80	442-452	103	47	3232160000HA	\$ 844.40	323216SS00HA	\$ 1,108.80
18	450	19.50-19.92	492-502	115	52	3232180000HA	\$ 1,173.30	323218SS00HA	\$ 1,436.90
20	500	21.60-22.06	549-560	138	63	3232200000HA	\$ 1,362.60	323220SS00HA	\$ 1,625.70
24	600	25.80-26.32	655-669	157	71	3232240000HA	\$ 1,551.80	323224SS00HA	\$ 1,814.50
30*	750	31.74-32.00	806-813	199	90	3232300000HA	\$ 2,736.80	323230SS00HA	\$ 3,580.10
36**	900	37.96-38.70	964-982	300	137	3232360000HA	\$ 3,298.30	323236SS00HA	\$ 4,131.70
48**	1200	50.50-51.98	1282-1320	CONSULT FACTORY		3232480000HA	POA	323248SS00HA	POA

*Please advise factory at time of ordering when to be used on PVC pipe.

**Fabricated in Carbon Steel

HOW TO ORDER: Specify Model Number, and Pipe Size. EXAMPLE: 24" Bell Joint for DI/CI Pipe. Order 3232-24. **Part Number:** 3232240000HA .

3233 A/C COUPLING LEAK REPAIR CLAMP


FOR CLASS 150 PIPE

CASTINGS: Ductile Iron per ASTM A536.

GASKET: NBR produced from 100% new rubber to ensure performance under varying pressures with superior storage characteristics. Suitable for oil, mild acids, water, salt media and most aliphatic hydrocarbon fluids with a temperature range of -25°F to +248°F.

BOLTS & NUTS: Low alloy Steel per ASTM A325 and ASTM A563.

FINISH: Epoxy.

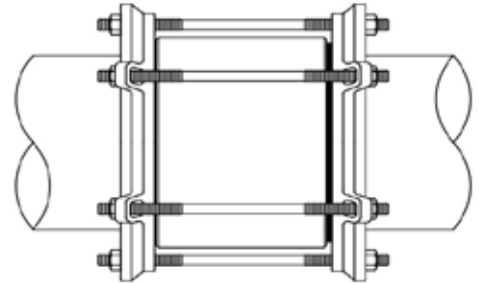

3233								
Nominal Pipe Size		Pipe OD Range		Approx Weight		Part Number	List Price	
Inches	MM	Inches	MM	lbs.	kgs.		A/C Coupling	Additional Gasket
4	100	5.07-5.20	129-132	25	11	3233040000HA	\$293.30	\$42.80
6	150	7.17-7.35	182-187	32	15	3233060000HA	\$337.00	\$53.20
8	200	9.37-9.50	238-241	37	17	3233080000HA	\$437.80	\$66.40

Gaskets	Part Number	List Price
4	V3233041	\$42.80
6	V3233061	\$53.20
8	V3233081	\$66.40

NOTE: This repair clamp is furnished with one gasket. If both ends of the A/C Coupling are leaking order one additional gasket.

HOW TO ORDER: Specify Model Number, and Pipe Size.

EXAMPLE: 8" 3233 A/C Coupling Leak Repair Clamp . Order 3233-8. **Part Number:** 3233080000HA .